

Stream C

The compact array solution for accurate 3D utility mapping



High quality, High productivity and Simple to Use compact radar system for real time underground surveys



IDS GeoRadar: The leader in multi-frequency and multi-channel Ground Penetrating Radar

www.idsgeoradar.com



Stream C

Stream C is the compact array solution for real-time 3D mapping of underground utilities and features. Thanks to increased level of accuracy provided by a massive antenna array, Stream C is able to automatically detect pipes and cables.

Daily use of Stream C is aided by ergonomic features including electronic ride height adjustment, options to tow manually or with a small vehicle and a motor assisted drive wheel.

Stream C is available in both Basic and Advanced configurations.

STREAM C BENEFITS

- High Productivity: surveys only need to be performed in one direction to ensure optimal detection for both longitudinal and transversal pipes.
- No advanced training needed: the system automatically detects and locates the position of pipes in real time and displays them on screen.
- Reduced user fatigue: thanks to electronic ride height adjustment and a motor assisted drive wheel.
- Facilitates large surveys: the system can be towed manually or with a small vehicle, increasing the acquisition speed (up to 6 km/h).

STREAM C FEATURES

- Massive array of 34 antennas in two polarizations: this enables an accurate 3D reconstruction of the underground utility network to be created in a single scan.
- Automatic Pipe Detection (APD): real-time automatic detection of buried pipes and cables
- Compact size: Stream C's small dimensions enable it to survey areas inaccessible to larger array systems while maintaining the same accuracy.
- Robust construction: built to the highest standards and with hardwearing materials so that it can be used in harsh, demanding environments.
- 3D radar tomography: real-time tomography on a GPS or total station assisted cartographic background.
- Professional subsurface survey: pipes, cables and buried objects can be automatically transferred to CAD and GIS formats allowing a complete subsurface GIS based digital map to be quickly produced.



Stream C antenna array




Stream C pivoting and motorized front wheel




Stream C with vehicle towing kit



Stream C adjustable handle



OneVision: real-time acquisition software with APD (Automatic Pipe Detection)

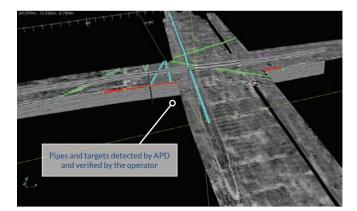

GRED HD 3D CAD: post processing software with pipe results



No exposed cables
provides protection agains
ruptures in the field

SYSTEM SPECIFICATIONS			SOFTWARE SPECIFICATIONS		
BASIC Configuration	OVERALL WEIGHT (PC not included):	75 kg (165 lbs)	OneVision	 Automatic calibration for an easy and quick start-up Visualization and storage of antenna array data set (32 channels) Real-time visualization of radar tomography (time slices) On site marking via software of targets and 	
ADVANCED Configuration	OVERALL WEIGHT (PC not included):	95 kg (209 lbs)			
RECOMMENDED LAPTOP:		Panasonic FZ G1			
MAX ACQUISTION SPEED:		6 km/h (3,7 mph)	Acquisition Software	pipesConnection with NMEA positioning	
RADAR POWER CONSUMPTIO	N:	60 W	 device Export to IDS GeoRadar GeoMap, dxf, shp and kml formats 		
POSITIONING:		Integrated encoder and/or GPS / Total station		Multilanguage supportMetric and Imperial units	
RADAR POWER SUPPLY:		SLA Battery 12VDC 24 Ah			
ENVIRONMENTAL:		IP65	ADP Tool for OneVision Acquisition Software (optional)		Acquisition Software
ANTENNA FOOTPRINT:		120x57 cm			
NUMBER OF CHANNELS:		32 (23VV-9HH)			
ANTENNA CENTRAL FREQUEN	ICY:	600 MHz			
ANTENNA POLARIZATION: HH ar		HH and VV	GRED HD 3D CAD Processing Software	Advanced 3D processing software with	
SCAN WIDTH:		96 cm	a direct export link to AutoCAD		
CERTIFICATION:		EC, FCC, IC			